# CocoConnect Marketplace Design Specification

A page-by-page brief for the marketplace redesign. Every screen, what belongs on it, and the states that have to be drawn — ready to hand to a designer.

| DOCUMENT | PRODUCT | SCREENS | ISSUED |
| --- | --- | --- | --- |
| **Design spec v1.0** | **CocoConnect** | **13 to design** | **14 Oct 2026** |

Prepared for the Coconoto design team
Platform: coconoto.africa · `/cococonnect`



# Contents


PART A — CONTEXT

A1 What this document is — 3
Scope, audiences, guiding principles, priority tiers

A2 Design system reference — 4
Colour, type, spacing, grid, component inventory

A3 Global elements — 5
Navbar, account menu, footer, cards, badges, empty & loading patterns

PART B — BUYER-FACING SCREENS

B1 Marketplace Browse — 6
Search, categories, sort, product grid

B2 Product Detail — 7
Gallery, specifications, vendor card

B3 Vendor Storefront — 8
Who you are buying from

B4 Request Basket — 9
Multiple products in one enquiry

B5 Place Order — 10
Buyer details, delivery, summary

B6 Order Confirmation — 11
Reference number and what happens next

B7 Buyer Login — 12
Split-panel sign in

B8 Buyer Signup — 13
Account creation

B9 Buyer Dashboard — 14
Orders, profile, upgrade to seller

PART C — SELLER-FACING SCREENS

C1 Seller Login — 15
Vendor sign in

C2 Seller Signup — 16
Open a storefront

C3 Seller Dashboard · 1 of 2 — 17
Shell, overview, products, add-product form

C3 Seller Dashboard · 2 of 2 — 18
Orders, storefront settings, states

C4 Become a Seller — 19
Upgrade an existing buyer account

PART D — DELIVERY

D1 States & responsive matrix — 20
Every screen × every state

D2 Handoff checklist — 21
Deliverables, naming, assets, open decisions


**How to read a page spec.** Left column: purpose, content in reading order, required states. Right column: a structural wireframe showing *hierarchy and order*, not visual design — grey blocks are content, green blocks are actions, dashed blocks are optional or new.

# A1 — What this document is

Context Read first

### THE BRIEF IN ONE PARAGRAPH

CocoConnect is the trading arm of Coconoto — a marketplace where farmers, cooperatives and processors list coconut products and buyers across the value chain source them. It works today, but it was built straight from component primitives with no design pass. Pages are dense, the product detail step is a modal instead of a page, and three screens that a marketplace cannot do without — a product page, a vendor storefront and an order confirmation — do not exist. This document is the redesign brief: it fixes the information architecture and says what has to be drawn. It deliberately does **not** prescribe the visual language; that is the designer's job.

### WHO THE PRODUCT SERVES

**Buyers**

Businesses sourcing coconut inputs — food and beverage processors, cosmetic and coir manufacturers, aggregators, exporters and institutional buyers. They compare *price per unit*, available volume, quality grade and lead time. They are not impulse shoppers.

**Sellers**

Farmers, cooperatives and processors with produce to move. Many will be on a phone, often on poor connectivity, and are not confident with dashboards. Listing a product has to feel like filling a simple form, not operating software.

### WHAT EXISTS TODAY

| SCREEN | ROUTE | CONDITION |
|---|---|---|
| **Marketplace browse** | `/cococonnect` | Works. Search, category rail, sort, grid. Visually untreated. |
| **Order modal** | — (in-page) | Carries product info, quantity and checkout in one dialog. No URL, no share. |
| **Buyer login / signup** | `/buyer-login` , `/buyer-signup` | Both work. Login has a designed split panel; signup is an unstyled form card. |
| **Buyer dashboard** | `/buyer-dashboard` | Orders, profile, upgrade-to-seller. Reasonably built; no overview landing. |
| **Seller dashboard** | `/vendor-dashboard` | Products / orders / profile tabs. *Two* separate implementations exist. |
| **Seller login / signup** | `/vendor-login` , `/vendor-signup` | Work. Login is designed, signup is not. |
| **Not built at all** | — | No product page, no vendor storefront, no basket, no order confirmation. |

### GUIDING PRINCIPLES

- **One clear next action per screen.** Every page answers "what do I do here?" without the user hunting.
- **Trust over gloss.** B2B buyers want verification, minimum order, lead time and grade — not lifestyle photography. Consumer-marketplace gloss will read as unserious.
- **Say "request", not "buy".** There is no payment on the platform; a vendor confirms the order by hand. Every label, button and confirmation must reflect that so nobody expects instant checkout.
- **Mobile is the seller's primary device.** Design the seller side at 375 px first. The buyer side can be desktop-led.
- **Price and unit never separate.** `₦4,500/kg` is one object; never let a line break split them.
- **Nothing that deserves a URL hides in a modal.** Product detail, checkout and confirmation all become pages.

### PRIORITY TIERS

P0 — must ship the eight screens a buyer or seller cannot complete a task without. P1 — should ship needed for a credible B2B marketplace. P2 — reserve acknowledged, not designed in this round.

# A2 — Design system reference

Context | Current state — designer may replace

These are the tokens in use across the site today. The redesign is free to revisit them, but anything kept should be kept deliberately — the marketplace shares a navbar and footer with the rest of the site, so a divergent palette will look pasted on.

## COLOUR

| HEX | ROLE TODAY | NOTES |
|---|---|---|
| **#17AD10** | Primary action green | Buttons, links, active nav. The brand's loudest colour. |
| **#8CC63F** | Lime accent | Active nav underline, small highlights. Sparingly. |
| **#6F4A32** | Brown | CTA bands, headings on light surfaces. |
| **#1f1611** | Footer background | Near-black brown. Anything on it needs real contrast. |
| **#618A42** | Status green | Success text. |
| **#d4a574** | Warm border | Card and divider edges. |
| **Emerald / amber / rose** | Semantic | In-stock, low-stock, out-of-stock and order-status chips. Keep as a defined set, not ad-hoc classes. |

> **Ask.** The marketplace currently runs a glassmorphism treatment — frosted white cards over a radial green gradient, with blur orbs. It is decorative and reads consumer. For a B2B trading surface, a flat light background with a denser grid and heavier price typography will communicate more.

## TYPOGRAPHY & SPACING

- **Headings:** Lora (serif) site-wide; marketplace uses a geometric sans. Pick one for the marketplace and state it.
- **Body:** system sans, 14–16 px.
- **Numbers:** prices and quantities need a tabular figure so columns line up.
- 4 px base unit. Card padding 16/20/24.
- Radius: 8 px controls, 12–16 px cards.
- Shadow: one soft elevation only. No multi-layer glow.

## LAYOUT & BREAKPOINTS

| NAME | WIDTH | BEHAVIOUR |
|---|---|---|
| **Mobile** | 375–639 | Primary design target for the seller side. Single column, category rail becomes a drawer. |
| **Tablet** | 640–1023 | Two-column product grid, sidebar still collapsed. |
| **Desktop** | 1024–1439 | Left category rail (270 px) + three-column grid. Max content width 1280 px. |
| **Wide** | 1440+ | Same grid, more whitespace. Never four columns of product cards. |

## COMPONENT INVENTORY

### Already built

Button, Badge, Card, Input, Label, Textarea, Select, Table, Dialog, Sheet, Sidebar, Toast, Skeleton.

### Needs designing

Product card, category rail item, quantity stepper, stock chip, verification badge, empty state, pagination / load-more, filter chip, breadcrumb.

### Needs deciding

Image placeholder, avatar fallback, status pill set, star rating (P2), data-table density.

# A3 — Global elements

All screens | Redesign

These appear on most or all screens. Design them once, in all states, before the individual pages — every page spec below assumes them.

## NAVBAR

- Sticky, 72 px tall, stays in document flow (no compensating page padding).
- Left: Coconoto wordmark. Centre: Home · Services (dropdown: Coco-Tech, CocoCycle Hub, Coco-Connect, Coco Drink & Eat) · Marketplace · Blog · About Us · Contact us.
- Right: the **account cluster** — this is the one region that differs per screen.
- Under 1024 px: logo + hamburger; nav becomes a full-height sheet with the account links at the bottom.
- Active item is derived from the route, so Marketplace lights up on every `/cococonnect/*` page.

## ACCOUNT CLUSTER — THREE STATES

| STATE | SHOWS |
|---|---|
| **Signed out** | Single green "Login" pill. |
| **Signed in** | Initials avatar + chevron. Dropdown: Profile · My Orders · Sell on Coconoto · Sign out. |
| **Signed in + seller** | Same, plus "Seller dashboard" as the first item. |

> **Gap to fix.** There is no basket indicator anywhere in the navbar. Once the basket exists (B4), the cluster needs a basket icon with an item count between the search and the avatar.

## FOOTER

- Shared site footer, dark brown `#1f1611` background, green logo mark, link columns.
- Identical on every marketplace page — do not redesign per page.

## REPEATING PATTERNS

- **Empty state.** Centred icon in a soft tinted square, one bold line, one explanatory line, one action button. Every list on the site uses this shape.
- **Loading.** Skeleton cards that match the real card's proportions — never a spinner on a list.
- **Error.** Inline bordered strip above the content with a retry action. Full-page error only when nothing at all loaded.
- **Toast.** Bottom-right, auto-dismiss, success/error variants.

NAVBAR — DESKTOP

Logo | Home · Services · **Marketplace** · Blog · About · Contact | ⌕ 2 JD

ACCOUNT DROPDOWN

Jane Doe
jane@buyer.com

Profile
My Orders
Sell on Coconoto
Sign out

NAVBAR — MOBILE

Logo | ☰

EMPTY STATE PATTERN

**No orders yet**
Start shopping to see your orders here.
Browse products →

SKELETON CARD

STATUS CHIP SET

Pending · Confirmed · Processing · Shipped · Delivered · Cancelled
In stock · Only 3 left · Out of stock · ✓ Verified

*Six order statuses and four product states. Define colour, icon and wording for each as one component.*

B1

# Marketplace Browse

`/cococonnect` Redesign Public P0

## PURPOSE

The shop floor. A buyer lands here from search or the nav, narrows to what they need in as few moves as possible, and opens a product.

## CONTENT, TOP TO BOTTOM

**01 Navbar**
With the account cluster and (new) basket indicator.

**02 Hero band + search**
Headline "Discover Quality Coconut Products", one-line subhead, three trust badges — Verified vendors · Nationwide delivery · Quality guaranteed — and the full-width search field. Search covers product name, description and vendor, with a clear (×) when filled. Keep the band shallow: it is a signpost, not a billboard.

**03 Category navigation**
Desktop: a 270 px sticky rail with "All Products" plus the 11 categories, each with a live count. Mobile: a row of the top 4–5 categories as quick-chips, plus a "Categories" button opening a right-hand drawer with the same items.

**04 Results toolbar**
"Showing N products", the active filter as a removable chip, Sort (Newest · Price low→high · Price high→low · Name A–Z), and a grid/list toggle.

**05 Product grid**
2 columns mobile, 3 desktop. Card: image, category badge, name (2-line clamp), vendor name + verified tick, price with unit, stock chip. Whole card is the link target.

**06 Load more + how it works**
New. The grid currently renders everything at once — pick a page size and one pattern. Below it, a three-step strip: Browse → Send a request → Vendor confirms, which sets the expectation that this is an enquiry marketplace.


**07 Footer**
Shared site footer.

## STATES TO DESIGN

- **Loading** — six skeleton cards in the real grid proportions.
- **No results** — search term echoed back, category named if active, "Clear filters" action.
- **Empty category** — "No products in this category yet" plus a route back to All Products.
- **Load failure** — inline strip with Retry. Plus the mobile drawer open and closed.

> **Judgement call.** The page is currently one frosted card floating on a green gradient with decorative blur orbs — the biggest single thing making the marketplace look like a D2C shop. A flat surface, a tighter card and a larger price will do more for credibility than any new component.

> **Decide.** Show seller location and minimum order on the card itself? For B2B sourcing this is often the deciding factor, and it costs one line.

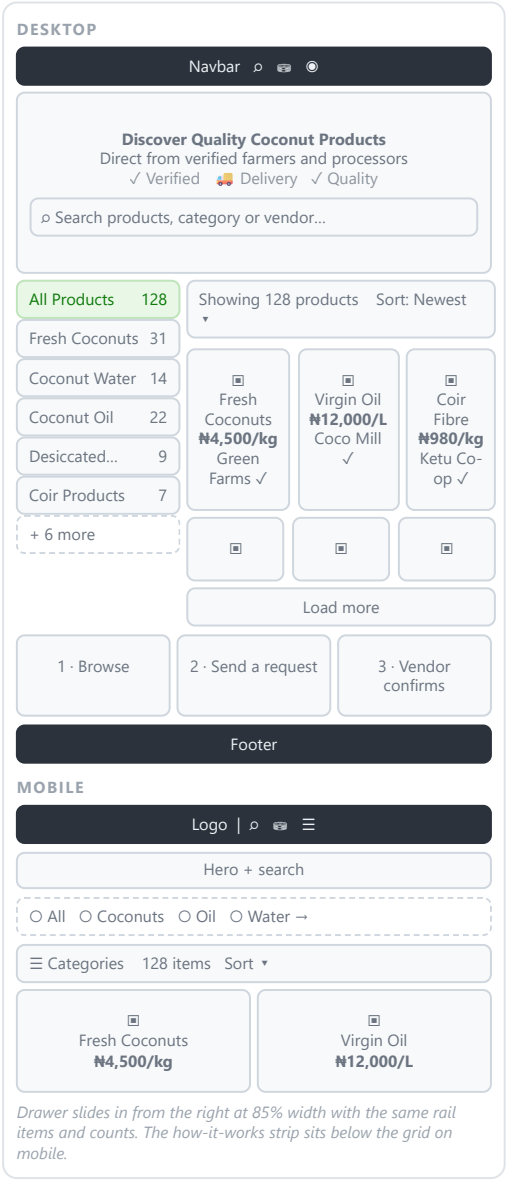


*Drawer slides in from the right at 85% width with the same rail items and counts. The how-it-works strip sits below the grid on mobile.*

B2

# Product Detail

`/cococonnect/product/:id` New page Public P0

## PURPOSE

Give a product a home of its own so it can be shared, indexed and described properly. Today the only way to see a product is the order modal, which has no URL and no room for the specifications a B2B buyer needs before enquiring.

## CONTENT, TOP TO BOTTOM

01 **Breadcrumb**
Marketplace / {Category} / {Product name}. Doubles as a route back to the filtered grid.

02 **Gallery**
Main image at a fixed ratio with thumbnails beneath. Products currently carry a single image, so design for one and leave room for four. Missing image falls back to the coconut placeholder.

03 **Buy panel**
Right of the gallery. Product name, vendor line with the verified tick (links to B3), price with unit, stock status, quantity stepper with the available maximum, and the primary action.

04 **Primary + secondary actions**
Primary: **"Request to order"**. Secondary: "Add to basket" and "Message vendor". Out of stock replaces the primary with "Notify me when available".


05 **Specification block**
Category · Unit of measure · Available stock · *Minimum order* · *Packaging* · *Lead time* · *Origin*. The italicised four are new fields the designer should lay out now even if they ship later — they are the reason a B2B buyer trusts a listing.

06 **Vendor card**
Avatar or logo, business name, verified badge, location, member-since, and "View storefront". This is the trust anchor of the page.

07 **Full description**
Long-form text. Design for up to ~800 characters with a "read more" clamp.

08 **Similar products**
Three or four cards from the same category, reusing the grid card.

09 **Footer**
Shared site footer.

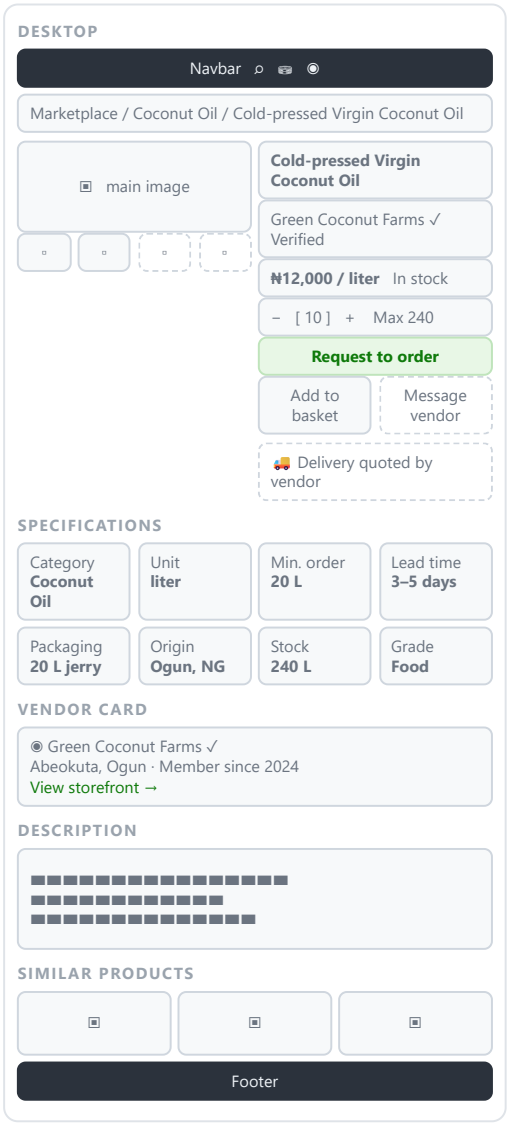


## STATES TO DESIGN

- **Loading** — gallery and panel skeletons.
- **Out of stock** — CTA disabled, "Notify me" replacement, chip on the gallery.
- **Product not found** — a proper 404 within the marketplace chrome, not the global error page.
- **No image** — the coconut placeholder at both gallery and thumbnail size.

> **Why this is P0.** Product pages are what search engines index and what buyers paste into WhatsApp when asking a colleague. Without it the marketplace cannot be found or shared.

B3

# Vendor Storefront

`/cococonnect/vendor/:id` New page Public P1

## PURPOSE

Let a buyer see who they are dealing with, and everything that seller offers, in one place. In B2B sourcing the seller matters as much as the product — buyers consolidate with one supplier. Today a vendor is a single line of text under a product name.

## CONTENT, TOP TO BOTTOM

01 **Breadcrumb**
Marketplace / {Business name}.

02 **Storefront header**
Logo or initials avatar, business name, verified badge, location, member since. If a banner image is ever added, this is where it goes.

03 **Description**
The vendor's own words about the business, clamped to three lines with an expand.


04 **Stat strip**
Products listed · Categories covered · Orders fulfilled (if we choose to show it) · Member since. Three or four compact stat cards.

05 **Contact block**
Phone and email as tap-to-act chips. Buyer-side only; never expose more than the vendor consented to publish.

06 **Filter + sort row**
Within-store category filter and the same sort options as the main grid.

07 **Product grid**
The vendor's active products, reusing the B1 card.

08 **Footer**
Shared site footer.

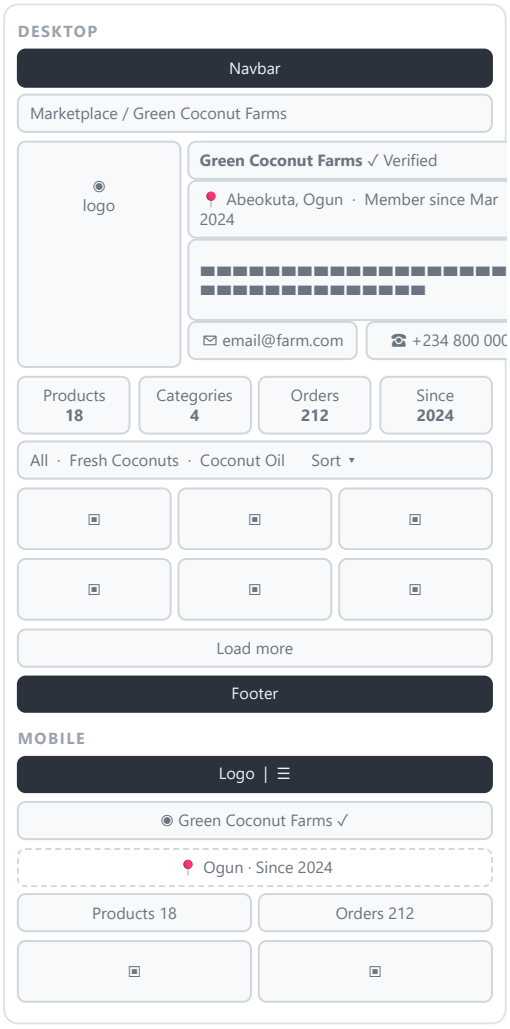


## STATES TO DESIGN

- **Vendor with no active products** — storefront still renders, grid shows "This seller has no active listings right now".
- **Unverified vendor** — no tick; do not draw attention to the absence, but never show a "pending" badge publicly.
- **No logo** — initials avatar fallback.
- **Vendor not found** — in-chrome 404.

> **Decide.** Should a vendor's phone number be public, or only revealed after the buyer sends a request? Public is better for conversion; gated is better for spam control. This is a business call, not a design one — but the design changes depending on the answer.

B4

# Request Basket

`/cococonnect/basket` New page Buyer P1

## PURPOSE

Let a buyer enquire about more than one product at a time. Today each product has to be ordered through its own form, so a buyer sourcing three items fills three forms and the vendor receives three unrelated orders.

## CONTENT, TOP TO BOTTOM

01 **Page title + count**
"Your request basket" with the number of items and distinct vendors.

02 **Line items**
Grouped by vendor. Each line: image, product name (links back to B2), unit price with unit, quantity stepper, line total, remove. Quantity changes recalculate live.

03 **Per-vendor subtotal**
Because fulfilment is per vendor, each group needs its own subtotal, not just one grand total.

04 **Order summary**
Sticky on desktop, at the bottom on mobile. Subtotal, delivery shown as "Quoted by vendor", total. One line of plain-language explanation that no payment is taken now.

05 **Notes field**
Optional free text applied to the whole request.

06 **Primary action**
"Continue to request" — deliberately not "Checkout".


07 **Empty state**
Basket icon, "Nothing here yet", "Browse the marketplace" action.

## STATES TO DESIGN

- **Empty basket** — the most likely first view; make it inviting, not apologetic.
- **Item went out of stock while in the basket** — inline warning on that line, quantity capped, remove offered.
- **Item's vendor deactivated it** — line struck through with a reason.
- **Multi-vendor basket** — two or three vendor groups stacked.
- **Quantity above available stock** — stepper clamps and shows "Max N".

**Decide.** Is a basket the right model for a quote-based marketplace? *Recommendation: yes*, because the alternative is a worse experience, not a simpler one — but rename it "request basket" everywhere and keep every label in request language so no one looks for a payment step that does not exist.

**Open question.** Multi-vendor requests currently have no backend concept — one order row points at one vendor. If the basket can hold two vendors, that has to be resolved before build. Flag this early.

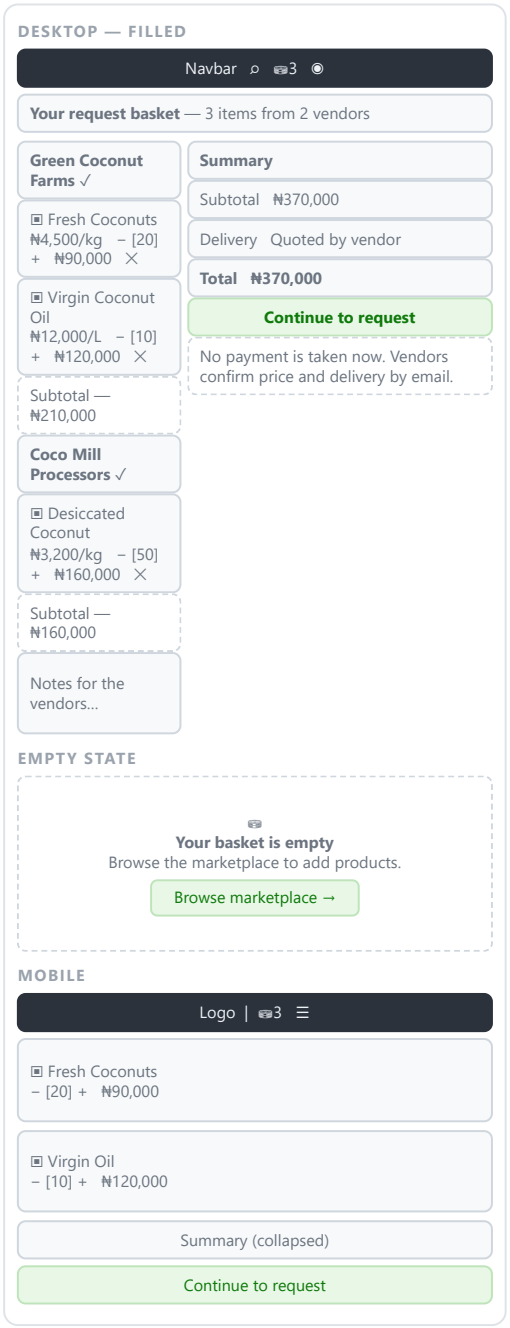

B5

# Place Order

`/cococonnect/checkout` Redesign Buyer + guest P0

## PURPOSE

Capture the buyer's details and delivery information and hand the request to the vendor. Today this is a modal on top of the product grid doing three jobs at once. It becomes a page; the product information moves out to B2 and B4.

## CONTENT, TOP TO BOTTOM

01 **Progress indicator**
Two steps — Details → Confirm. Even a minimal indicator reduces abandonment on a form this long.

02 **Buyer details**
Full name, email, phone. Pre-filled and read-only-friendly when the buyer is signed in; editable when they are a guest.

03 **Delivery**
Delivery address (multi-line), city, state, country. Signed-in buyers get their saved address pre-filled from their profile.

04 **Notes**
Free text — "any special requests". Keep it, it is used.

05 **Guest save-time panel**
When signed out: a compact bordered panel offering Login / Create account, explaining that an account saves details and tracks orders. Non-blocking — a guest must still be able to submit.

06 **Order summary**
Sticky right column: line items, quantity, subtotal, "Delivery quoted by vendor", total. Every item links back to its product page.


07 **Submit**
"Send request to vendor". Disabled while submitting, with a spinner state.

08 **Legal line**
One short line: the vendor will be notified and will contact you to confirm details and payment. Already present in the modal — keep it, it is doing real work.

## STATES TO DESIGN

- **Guest** — empty fields, save-time panel visible.
- **Signed in** — fields pre-filled from the profile, panel replaced by a "signed in as…" line with a change option.
- **Validation errors** — per-field, on blur and on submit.
- **Quantity exceeds stock** — inline error, submit blocked.
- **Submitting** — button busy, form locked, no double submit.
- **Submit failed** — error strip above the form, everything the buyer typed preserved.

> **Keep.** The quantity stepper clamping to available stock, and the live total recalculation. Both already work and both are the kind of detail that erodes trust when missing.

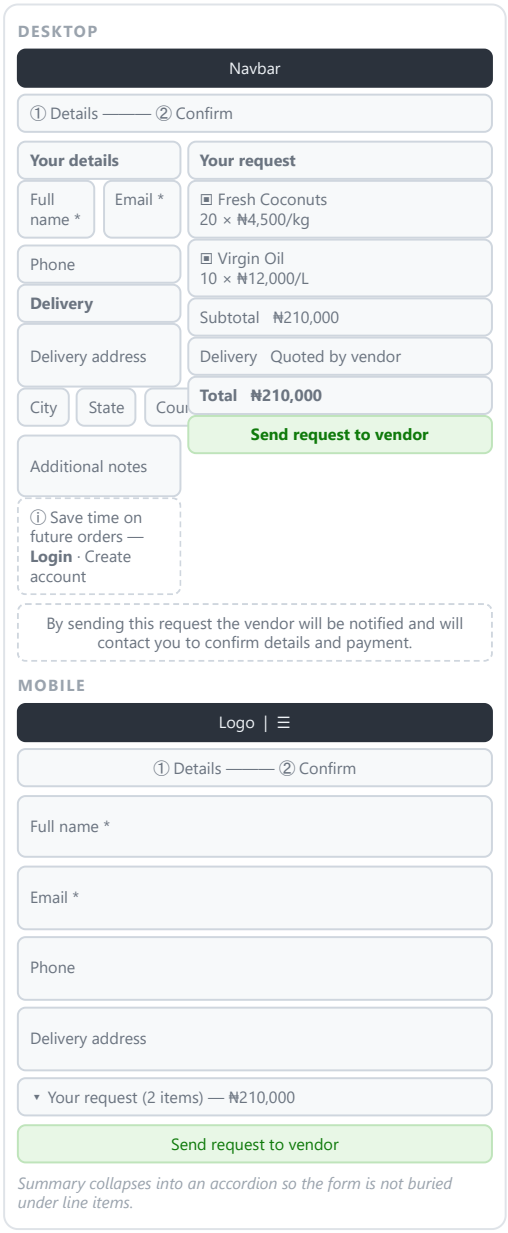

B6

# Order Confirmation

`/cococonnect/order/:reference` New page Buyer + guest P1

## PURPOSE

Close the loop. Right now success is a dialog that auto-dismisses after two seconds, leaving the buyer with no reference number, no record and nothing to screenshot. Every order needs a permanent, linkable confirmation.

## CONTENT, TOP TO BOTTOM

01 **Success header**
Large success mark, "Request sent", and the buyer's email echoed back so they know where to look.

02 **Reference number**
New. A short human-readable reference per order, displayed prominently and copyable. This is the single most requested thing after an order is placed.

03 **What happens next**
Three numbered steps — the vendor reviews your request → confirms price, quantity and delivery → you receive a confirmation email and arrange payment directly. This is where the no-payment model is explained for the last time.

04 **Order summary**
Read-only recap: items, quantities, unit prices, subtotal, delivery, total, delivery address, notes.

05 **Vendor contact**
Business name with email and phone as action chips, so the buyer can chase immediately if needed.


06 **Next actions**
"View my orders" (or "Create an account to track this" for guests), and "Continue browsing".

07 **Footer**
Shared site footer.

## STATES TO DESIGN

- **Guest confirmation** — extra emphasis on creating an account so the order is trackable.
- **Signed-in confirmation** — "View my orders" leads straight to the order in B9.
- **Multi-vendor request** — one confirmation per vendor, or one page listing each vendor's section. Decide and design accordingly.
- **Reference not found** — in-chrome 404 with a route back to the marketplace.
- **Email not delivered** — a soft warning with a resend action (P2, but reserve the slot).

> **Why it matters more than it looks.** A confirmation page is the artifact buyers screenshot and forward internally to get sign-off. For a B2B marketplace that is the moment a request turns into a real purchase.

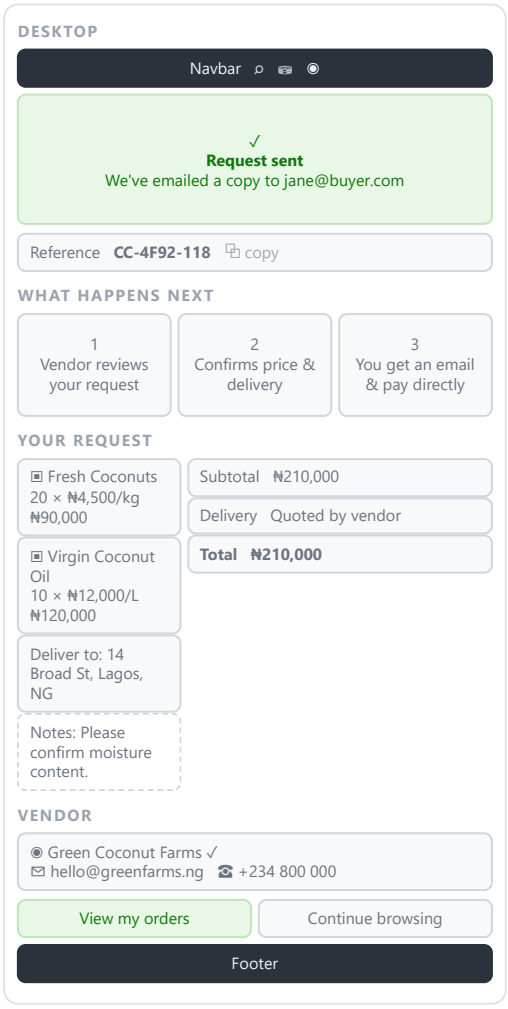

B7

# Buyer Login

`/buyer-login` Redesign Public P0

## PURPOSE

Sign an existing buyer in, quickly, with an obvious exit to the marketplace. The split-panel pattern already exists on the seller login — reuse it so the two feel like siblings.

## CONTENT, TOP TO BOTTOM

01 **Slim brand bar**
Logo left, "Home" action right. Deliberately not the full site navbar — a login page should not invite the user to wander off.

02 **Left panel (desktop only)**
Dark brand panel with a short pitch and three benefit rows: order tracking, saved delivery details, direct vendor contact. Include the panel on ≥1024 px only; below that it collapses away.

03 **Form card**
Title "Buyer sign in", one line of supporting copy.

04 **Email field**
With icon, validation on blur, error styling and message.

05 **Password field**
With icon, show/hide toggle, "Forgot password?" aligned to the label.

06 **Remember me**
Checkbox, default on — it remembers the email, not the session. Label it honestly ("Remember my email").


07 **Submit**
Full width, primary green, busy state with spinner.

08 **Alternate paths**
"New here? Create account" and a clear "Selling instead? Seller login" link, plus "Back to marketplace".

## STATES TO DESIGN

- **Idle** — empty, autofocused email.
- **Field invalid** — red border, helper text, focus ring.
- **Wrong credentials** — alert block above the form, fields preserved.
- **Submitting** — button busy, inputs locked.
- **Account disabled** — a distinct message with a support route.
- **Post-signup arrival** — a success strip confirming the account was created.

> **Missing today.** "Forgot password?" links to a query parameter that has no screen behind it. Either design a reset flow or remove the link — a dead password-reset link is worse than none.

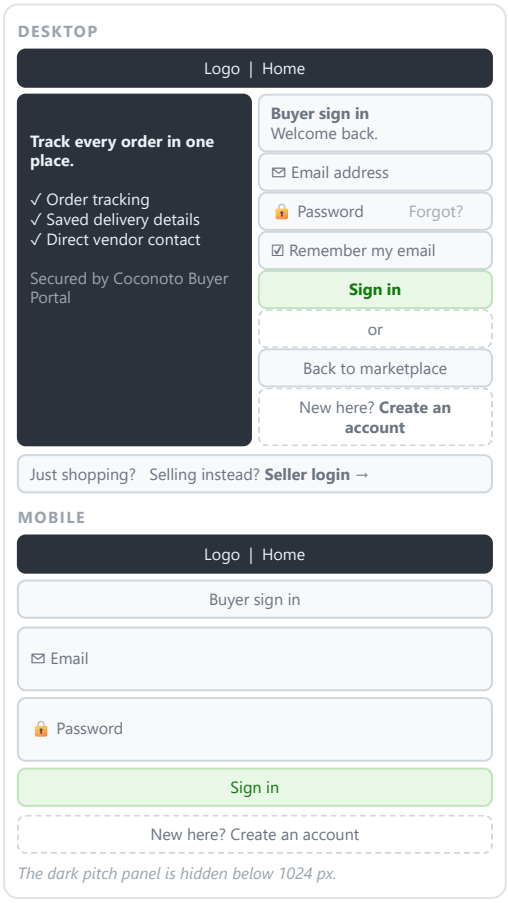


B8

# Buyer Signup

`/buyer-signup` Redesign Public P0

## PURPOSE

Create a buyer account in under a minute. Today this is a single long white card with thirteen unstyled fields and no visual relationship to the login page next to it.

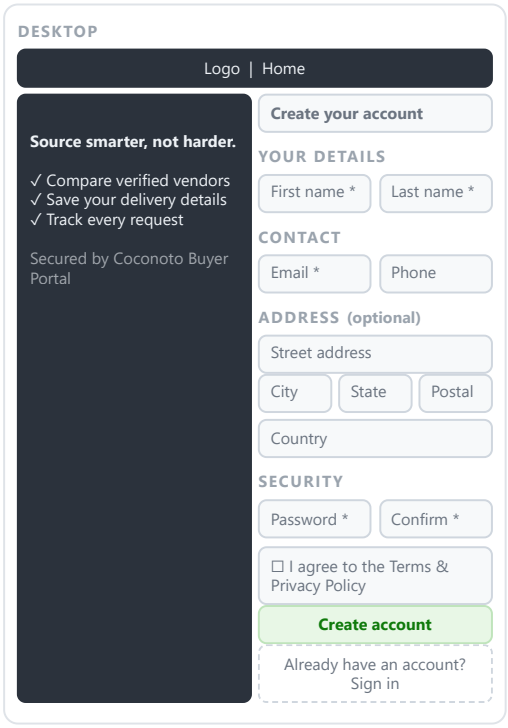


## CONTENT, TOP TO BOTTOM

01 **Slim brand bar**
Same as B7.

02 **Left panel (desktop only)**
Mirror of B7 with buyer-relevant benefits. Consistency here is worth more than novelty.

03 **Form header**
"Create your account", one supporting line.

04 **Group 1 — Your details**
First name, last name. Two columns on desktop.

05 **Group 2 — Contact**
Email, phone.

06 **Group 3 — Address**
Street address, city, state, postal code, country. Mark the whole group optional and say so once at the group heading, rather than asterisking five fields.

07 **Group 4 — Security**
Password, confirm password. Add a strength or requirement hint rather than only a minimum length.

08 **Terms acceptance**
New. A checkbox linking to the terms and privacy policy. There is currently no consent step at all, which is a compliance gap.

09 **Submit + alternate path**
"Create account" full width, then "Already have an account? Sign in".

## STATES TO DESIGN

- **Idle** and **partially filled**.
- **Password mismatch** — inline on the confirm field, not a page-level error.
- **Email already registered** — with a "Sign in instead" action right there.
- **Terms unchecked on submit** — highlight the checkbox.
- **Submitting** — busy button.

> **Decide.** One long form, or three short steps (Details → Address → Password) with a progress bar? For a buyer-side signup a single form is usually fine, but the address group is what makes it feel long — consider collapsing it behind "Add delivery address (optional)".

B9

# Buyer Dashboard

`/buyer-dashboard` Redesign Buyer (auth) P0

## PURPOSE

The buyer's home base: what did I order, what is its status, who do I contact, and how do I update my details. It is also the entry point to becoming a seller.

## SHELL

- **Desktop sidebar** (256 px) — initials avatar, name, "Buyer" or "Buyer · Seller" role line, grouped nav, then Sign out and Browse marketplace at the foot.
- **Mobile** — sticky top bar with avatar and name, hamburger opening a sheet with the same items.
- **Nav groups** — Account (My Orders · Profile · Sell on Coconoto) and, when the account also sells, Selling (Seller dashboard).

## TAB — MY ORDERS

01 **Greeting header**
Time-aware greeting with the buyer's first name, plus one line of context.

02 **Stat strip**
Total orders · In progress · Delivered · Total spent. Four compact cards.

03 **Order cards**
Per order: product image, name, status badge, date, vendor, quantity, total (emphasised), delivery address, notes, and vendor contact chips.

04 **Empty state**
"No orders yet" with a Browse products action.

## TAB — PROFILE

01 **Identity card**
Avatar, full name, email, Edit profile action.


02 **Detail grid**
Email, phone, address, city, state, country, postal code — each a labelled tile with an icon. "Not provided" for blanks.

03 **Account meta**
Account created date, then Edit mode turns the same grid into inputs with Save / Cancel and success or error feedback.

## STATES TO DESIGN

- **Loading** — dashboard skeleton, not a bare spinner.
- **No orders**, and a partially filled profile.
- **Profile save success / failure.**
- **Buyer who is also a seller** — extra nav group and the extra tab.
- **Load failure** — currently a bare "Failed to load buyer data" line; needs a real error state with retry.

> **Recommendation.** Add an **Overview** tab as the default landing — spend over time, open requests, reorder shortcuts. A returning buyer currently lands on a list with no summary of how their sourcing is going.

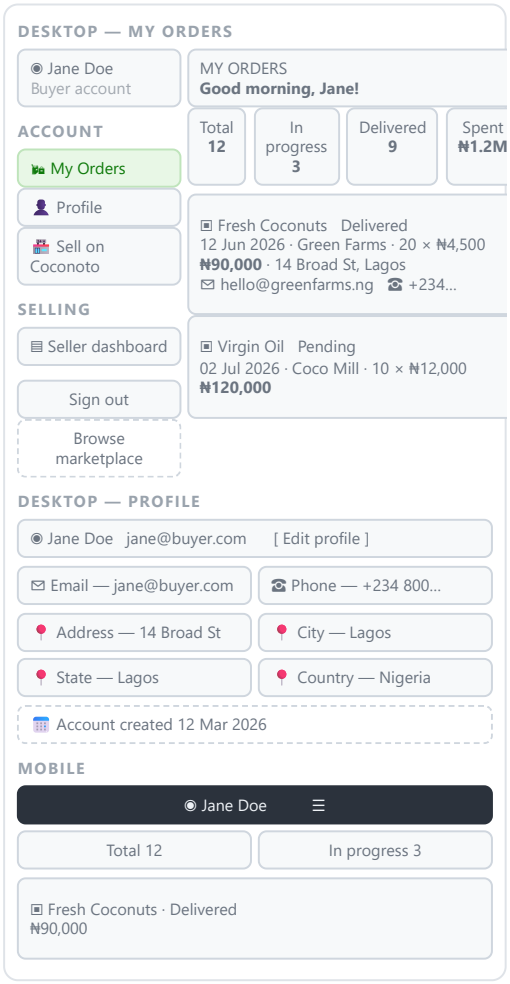

C1

# Seller Login

`/vendor-login` Redesign Public P0

## PURPOSE

Sign an existing seller in and get them into their dashboard. This page already has the strongest layout on the marketplace — the redesign should refine it, not replace it, and then reuse it as the template for the buyer login.

## CONTENT, TOP TO BOTTOM

01 **Slim brand bar**
Logo left, Home action right.

02 **Left panel (desktop only)**
Dark green pitch panel: "Grow your coconut business", one supporting line, and three benefit rows — sales analytics, verified seller badge, direct buyer enquiries.

03 **Form card**
Title "Seller sign in", one supporting line.

04 **Email field**
Icon, validation on blur.

05 **Password field**
Icon, show/hide toggle, "Forgot password?" beside the label.

06 **Remember me**
Checkbox, default on.


07 **Submit**
"Sign in to dashboard", full width.

08 **Alternate paths**
"Don't have a storefront yet? Sign up" and "Just shopping? Buyer login", plus "Back to marketplace".

## STATES TO DESIGN

- **Idle** — autofocused email.
- **Field invalid** — red border plus inline helper text.
- **Wrong credentials** — alert block above the form.
- **Submitting** — busy button.
- **Account deactivated** — distinct message, support route.

> **Refinements worth making.** The current page has two competing "Sign in" headings (one for mobile, one for desktop) and the seller logo is set as live text with a favicon substituted for the letter "o" — that needs to become a proper asset so it does not break in other contexts.

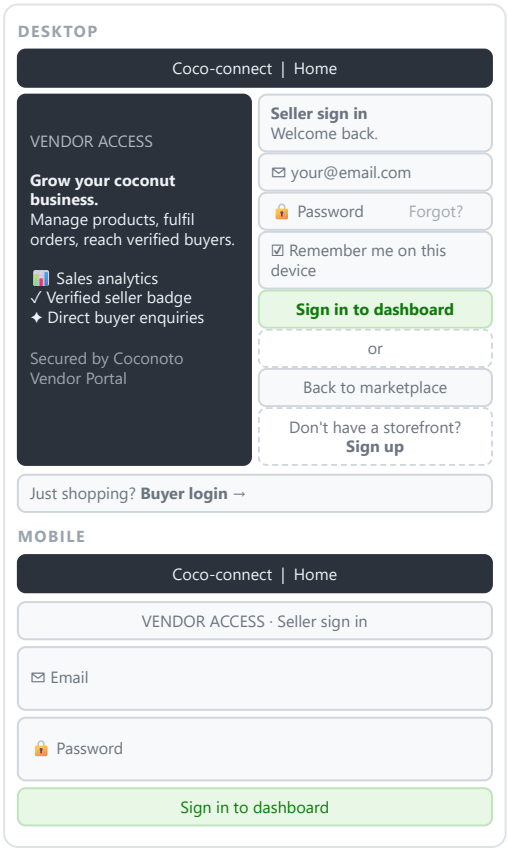

C2

# Seller Signup

`/vendor-signup` Redesign Public P0

## PURPOSE

Open a storefront. This is the highest-intent page on the seller side and the one most likely to be abandoned, so it needs the most care — and it should share the split-panel layout of C1 so the two read as one flow.

## CONTENT, TOP TO BOTTOM

01 **Slim brand bar**
Same as C1.

02 **Left panel (desktop only)**
"Start selling to verified buyers", with three short reasons and one line of social proof if we have numbers. This panel is the only place to argue the case, so it should do real work.

03 **Group 1 — Business**
Business name, contact name, phone. These are the identity fields; ask for them first.

04 **Group 2 — Location**
Business address. Consider making city and state separate fields so buyer-side filtering by region is possible later.

05 **Group 3 — About your business**
Free-text description with a character counter. This becomes the copy on the storefront (B3), so hint at what to write: what you grow or process, capacity, and quality.

06 **Group 4 — Security**
Password and confirm, with a requirement hint.

07 **Verification expectation**
New. A short note explaining that new sellers are reviewed before the verified badge appears, so nobody is surprised by "verification pending".


08 **Terms acceptance + submit**
Checkbox linking to terms, then "Open my storefront".

## STATES TO DESIGN


- **Idle** and **partially filled**.
- **Email already registered** — with "Sign in instead".
- **Password mismatch** — inline on confirm.
- **Terms unchecked** — highlight on submit.
- **Submitting** and **signup failed**.
- **Success → dashboard** — first-run state with no products (see C3).

> **Decide.** Should signup ask for a logo upload? The database already stores one and the storefront displays it, but there is currently no UI for it anywhere. Either collect it here (optional field) or in dashboard settings — but not both, and not nowhere.

DESKTOP

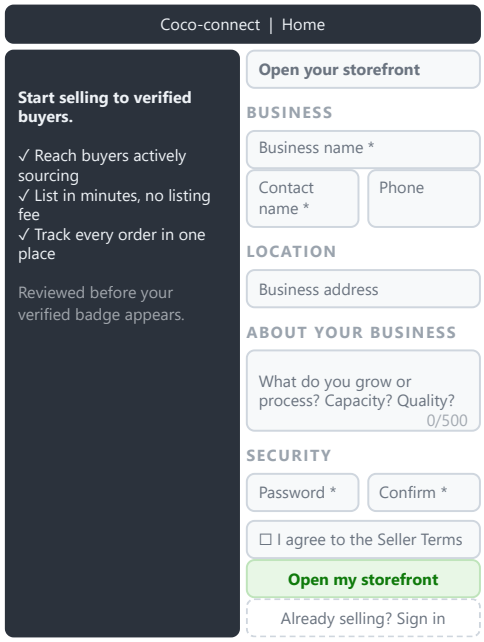


MOBILE

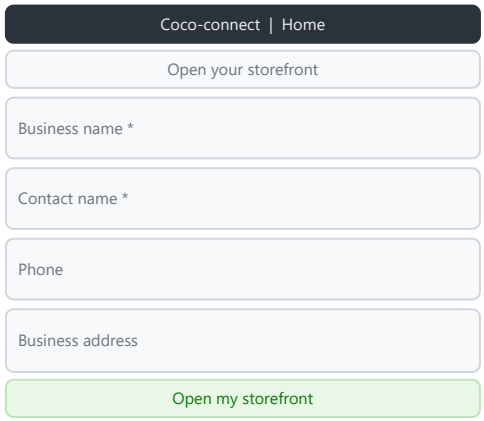


*This is the page most likely to be filled in on a phone. One field per row, large touch targets, no two-column grids.*

C3

# Seller Dashboard · 1 of 2

`/vendor-dashboard` · `/seller-dashboard` Redesign Seller (auth) P0

## PURPOSE

The seller's control room: list products, price them, keep stock honest, and move incoming orders through to delivered.

> **Unify first.** There are two seller dashboards in the code today — a standalone one with its own sidebar, and a products-only panel embedded inside the buyer dashboard. They show different things and will drift. The designer should design **one** dashboard, and the build should render that one dashboard in both entry points.

## SHELL

- **Desktop sidebar** — store avatar and business name, nav, then Sign out and View marketplace.
- **Mobile** — sticky top bar and a sheet.
- **Nav** — Overview · Products · Orders · Storefront settings. Reserve a fifth slot for Payouts.

## TAB — OVERVIEW (new)

01 **Stat cards**
Revenue this month · Open orders · Active products · Low-stock items.

02 **Action needed list**
New orders awaiting confirmation, and products at or below the low-stock threshold. This is the single most useful block on the page — a seller should be able to clear everything urgent from here.

03 **Recent orders**
The last five, linking into the Orders tab.

## TAB — PRODUCTS

01 **Header**
Title, "Add product" primary action, and a search or filter once the catalogue is large.


02 **Product cards**
Image, Active/Inactive badge, name, category, description clamp, price with unit, stock, and Edit / Delete. Reuse the buyer-facing card shape so sellers recognise their own listings.

03 **Empty state**
"You haven't added any products yet" with a prominent Add action.

04 **Add / edit product form**
Today a modal with a nine-field form, including a drag-and-drop image uploader. **Recommend a full page** — a form this size does not belong in a dialog. Fields: name, category, description, price, unit, stock quantity, image, active toggle.

## TAB — ORDERS & STOREFRONT SETTINGS

These two tabs are specified on the next page, together with the full state set.

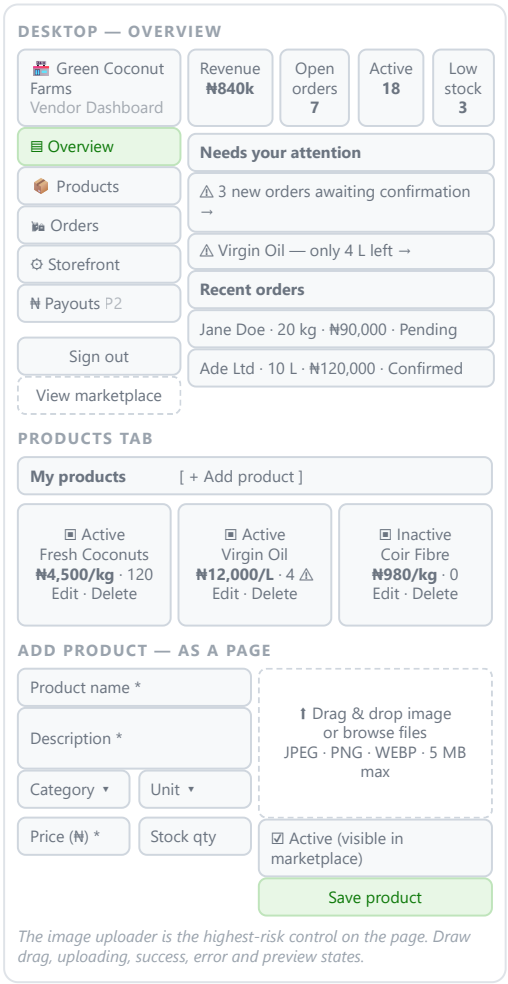


*The image uploader is the highest-risk control on the page. Draw drag, uploading, success, error and preview states.*

C3

# Seller Dashboard · 2 of 2

Continued — Orders, Storefront settings, states · P0

## TAB — ORDERS

01 **Filters**
New. Status, date range and product, plus a search by customer.

02 **Table**
Customer (name + email), product, quantity, total, status, actions. Rows should expand to reveal phone, delivery address and notes — the vendor needs those to fulfil.

03 **Status control**
Move an order through Pending → Confirmed → Processing → Shipped → Delivered, with Cancelled as an exit. Show the status as a chip and the change as a deliberate action with confirmation.

04 **Empty state**
"No orders yet."

## TAB — STOREFRONT SETTINGS

01 **Business details**
Business name, contact name, email, phone, address — editable, unlike today's read-only view.

02 **Logo upload**
New. The field exists in the database and the storefront needs it, but there is no UI at all.


03 **Description**
Editable, with a counter. Feeds the storefront.

04 **Verification status**
Verified or pending, with a short explanation of what changes it.

## STATES TO DESIGN

- **First run** — new seller, zero products, zero orders. Needs to feel like a beginning, not an empty page.
- **Loading** — skeleton rows and cards.
- **Image upload** — dragging, uploading, success, failure, oversized file, wrong file type.
- **Delete confirmation** — currently a browser `confirm()`; needs a real dialog.
- **Save failure** and **order status change failure**.
- **Low stock** — the warning treatment at card and overview level.

> **The one thing to get right.** A seller opens this dashboard to answer two questions: *did anything come in?* and *what do I need to do about it?* Everything else is secondary. If the Overview tab answers both at a glance, the rest of the dashboard can be utilitarian.

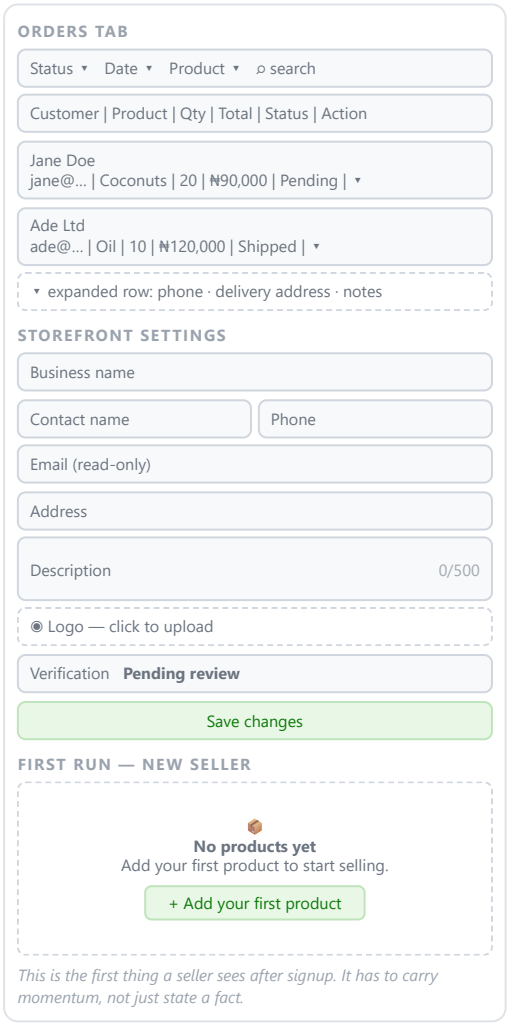


*This is the first thing a seller sees after signup. It has to carry momentum, not just state a fact.*

C4

# Become a Seller

`/buyer-dashboard → Sell on Coconoto` Redesign Buyer (auth) P1

## PURPOSE

Let an existing buyer open a seller account without a second login. Today this is a tab buried in the buyer dashboard, which undersells it — a buyer who sells is the most valuable account on the platform and this is the one moment we can convert them.

## CONTENT, TOP TO BOTTOM

01 **Value proposition header**
What selling on Coconoto actually gets them: reach buyers already sourcing, the verified badge, order tools. Three points, not a paragraph.

02 **What happens after**
New. Set expectations before the form — you'll get a seller dashboard, your listings go live immediately, verification is reviewed separately. Removes the "what did I just sign up for" feeling.

03 **Form**
Confirm your login password, then business name, contact name, phone, address and description. Group the same way as C2 so the two forms are recognisably the same thing.

04 **Submit**
"Become a seller".


05 **Success state**
A distinct confirmation panel: "You're a seller on Coconoto", one line of next steps, and two actions — Go to seller dashboard, Browse marketplace.

## STATES TO DESIGN


- **Not yet a seller** — the form.
- **Already a seller** — the success panel replaces the form on return visits.
- **Wrong password** — inline, on the password field.
- **Missing required fields** — inline per field.
- **Submitting** and **failure**.

> **Decide.** Should this be a full page of its own ( `/sell-on-coconoto` ) rather than a dashboard tab? A page can be linked from the account dropdown, the footer and marketing, and gives the pitch room to breathe. *Recommendation: yes, a page — with the dashboard tab linking to it.*

FORM STATE

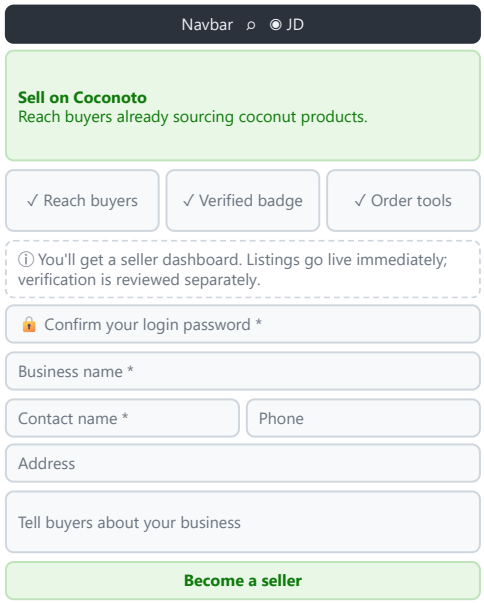


SUCCESS STATE

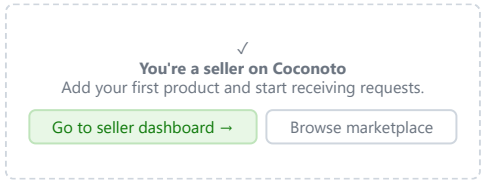


*The success state is the hand-off into C3. It should lead straight into the "Add your first product" empty state rather than a blank dashboard.*

# D1 — States & responsive matrix

Delivery | Every screen

A screen is not designed until these are designed. Tick each cell before handoff; an unticked cell is a question the build team will otherwise answer by guessing.

| SCREEN | LOADING | EMPTY | ERROR | MOBILE 375 | TABLET 768 | DESKTOP 1440 |
|---|---|---|---|---|---|---|
| **B1 Marketplace** | Skeletons | No results + empty category | Retry strip | 2-col grid + drawer | 2-col | Rail + 3-col |
| **B2 Product detail** | Skeleton | — | Not found | Stacked | Stacked | Gallery + panel |
| **B3 Vendor storefront** | Skeleton | No listings | Not found | Stacked | 2-col | Header + 3-col |
| **B4 Basket** | Skeleton | Empty basket | Stock changed | Stacked + sticky bar | Stacked | Lines + summary |
| **B5 Place order** | — | — | Validation + submit fail | Accordion summary | Stacked | Form + sticky summary |
| **B6 Confirmation** | — | — | Ref not found | Stacked | Stacked | 2-col recap |
| **B7 Buyer login** | — | — | Bad credentials | No side panel | No side panel | Split panel |
| **B8 Buyer signup** | — | — | Email taken | No side panel | No side panel | Split panel |
| **B9 Buyer dashboard** | Skeleton | No orders / no profile | Load failed | Top bar + sheet | Top bar + sheet | Sidebar + content |
| **C1 Seller login** | — | — | Bad credentials | No side panel | No side panel | Split panel |
| **C2 Seller signup** | — | — | Email taken | One field per row | One field per row | Split panel |
| **C3 Seller dashboard** | Skeleton | First run / no orders | Save failed | Top bar + sheet | Top bar + sheet | Sidebar + content |
| **C4 Become a seller** | — | — | Wrong password | Stacked | Stacked | Split panel |

## INTERACTION STATES EVERY CONTROL NEEDS

### Buttons & links

Default · hover · active · focus-visible · disabled · busy. The focus ring must be visible — it is a keyboard-accessibility requirement, not a nicety.

### Form fields

Default · focus · filled · invalid · disabled · read-only. Error text sits below the field and is announced to screen readers.

### Cards & rows

Default · hover (pointer only) · focus · selected · disabled. Cards that are clickable must be reachable by keyboard.

## ACCESSIBILITY FLOOR

- Body text at 4.5:1 contrast minimum; the green on white and the muted grey both need checking.
- Never convey stock or order status by colour alone — pair every chip with a word or icon.
- Every image needs alt text; product images fall back to the product name.
- Touch targets at least 44 × 44 px, especially the quantity steppers and the mobile drawer close button.
- All flows must be completable with the keyboard alone, including the product grid and the order status control.

# D2 — Handoff checklist

Delivery

## WHAT TO DELIVER, PER SCREEN

- **Three frames minimum** — desktop 1440, tablet 768, mobile 375. Seller screens: mobile is the primary, so design that one first.
- **Every state from the D1 matrix**, drawn on the artboard, not described in a comment.
- **Interaction states** for every interactive element — hover, focus, disabled, busy.
- **Empty and error states** for every list and form.
- **Final copy** in the frames. No lorem ipsum, no "TBD". If a string is not decided, raise it as an open question instead.
- **Spacing annotations** on at least one representative frame per screen.
- **Assets exported at 2×**, named as below.

## FILE & LAYER NAMING

- Frames: `B1 Marketplace – Desktop 1440`, `C3 Seller Dashboard – Mobile 375`.
- Components: `ProductCard`, `CategoryRailItem`, `QuantityStepper`, `StockChip`, `VerifiedBadge`, `OrderStatusChip`, `EmptyState`.
- Icons: use one set throughout — the build uses Lucide, so staying on Lucide avoids a redraw.
- Exports: `product-placeholder@2x.png`, `avatar-fallback@2x.svg`, `hero-illustration@2x.webp`.

## ASSETS NEEDED FROM COCONOTO

- Wordmark files at the correct ratios — the current assets are 760 × 121 and 2170 × 725, and the footer needs the green mark rather than the brown one.
- A coconut product placeholder illustration for missing images.
- Three or four real product photographs for the demo grid, including one on a white background.
- A seller logo and a buyer avatar for the demo states.

## OPEN DECISIONS

Each of these changes the design. They need an answer before or during the first review, not after.

| REF | QUESTION |
|---|---|
| **B1** | Show seller location and minimum order on the product card? |
| **B3** | Is vendor phone and email public, or revealed only after a request? |
| **B4** | Can one request span multiple vendors? The backend currently has no concept for it. |
| **B6** | One confirmation per vendor, or one page with per-vendor sections? |
| **B7** | Password reset — design the flow, or remove the link? |
| **B8** | Single signup form, or three steps with a progress bar? |
| **C2** | Collect a seller logo at signup, or in dashboard settings? |
| **C4** | Promote "Become a seller" to its own page? |
| **A2** | Keep the glassmorphism treatment, or move to a flat B2B surface? |

## NOT IN SCOPE THIS ROUND

- **Payments** — the platform takes no money; vendors settle directly. Out of scope, but the Payouts nav slot is reserved.
- **Ratings & reviews** — P2. The verified badge carries trust for now.
- **Buyer–seller messaging** — P2. Today contact happens by email and phone, which is why the confirmation page surfaces both.
- **Admin dashboard** — P2. Vendor verification is handled operationally.
- **Multi-currency** — naira only.

## SUGGESTED ORDER OF WORK

1. A3 global elements — the components every page needs.
2. B1 browse, B2 product detail, B5 place order, B6 confirmation — the critical buying path.
3. C3 seller dashboard, C2 seller signup — the supply side.
4. B7–B9 and C1, C4 — the account and entry screens.
5. B3, B4 — the P1 additions.